

致精 致简
Stability and Simplicity



COMPANY PROFILE About us

公司简介

宁波市普乐电器有限公司是一家高科技公司，从事各种照明产品的灯具控制设备业务，拥有自己的研发，制造和营销团队。

我们的产品拥有CE, RoHS, TUV, VDE, CB, ENEC, EAC, CCC认证, 产品远销50多个国家和地区。

宗旨：致精，致简。用技术打造品牌，以诚信赢得世界。

We are a high-tech company, which is engaged in business of lighting control devices for all kind of energy-efficient lighting products with our own R&D, manufacturing and marketing.

Our products are certificated by CE, RoHS, TUV, VDE, CB, ENEC, EAC, CCC and exported to 50 countries and regions.

Motto: Stability and Simplicity. Build the brand with technology, Win the world with integrity.



宁波市普乐电器有限公司
NINGBO LUXDATOR ELECTRICAL CO.,LTD

FACTORY IN CHINA:

General Manager: Zhang Yan
M.P: +86 18667830937
E-mail: zhang.yan@luxdator-ele.com

Zip Code: 315153
Tel: +86 574 88027063
Fax: +86 574 88029042

No.169 ShanShan Road
WangChun Industrial Zone, Haishu, Ningbo China
浙江省宁波市海曙区集士港望春工业园区杉杉路169号

www.luxdator-ele.com

UV灯镇流器 Ballast for UV lamp

PL-HPEB系列/series

220-240V

塑壳 内置镇流器

Plastic/Built-in ballast



产品参数：PRODUCT PARAMETER

产品型号 Model Number	输入电压 Input Voltage (V)	适配灯管类型 (Lamp Type)				产品性能 (parameters)		产品尺寸 L*W*H Product size (mm)
		功率 Power (W)	灯头 lamp holder	外型 Appearance	灯管电流 lamp current	预热启动 preheat	异常保护 with abnormal protection	
PL-HPEB-118W*UV	220-240	1*18	2G11	H/U	370	YES	YES	183x32x26
PL-HPEB-218W*UV	220-240	2*18	2G11	H/U	370	YES	YES	210x40x31
PL-HPEB-124W*UV	220-240	1*24	2G11	H/U	350	YES	YES	183x32x26
PL-HPEB-224W*UV	220-240	2*24	2G11	H/U	350	YES	YES	210x40x31
PL-HPEB-136W*UV	220-240	1*36	2G11	H/U	440	YES	YES	183x32x26
PL-HPEB-155W*UV	220-240	1*55	2G11	H/U	530	YES	YES	210x40x31
PL-HPEB-110W*UV	220-240	1*10	G13	T8	230	YES	YES	183x32x26
PL-HPEB-115W*UV	220-240	1*15	G13	T8	340	YES	YES	183x32x26
PL-HPEB-215W*UV	220-240	2*15	G13	T8	340	YES	YES	210x40x31
PL-HPEB-120W*UV	220-240	1*20	G13	T8	360	YES	YES	183x32x26
PL-HPEB-130W*UV	220-240	1*30	G13	T8	370	YES	YES	183x32x26
PL-HPEB-230W*UV	220-240	2*30	G13	T8	370	YES	YES	210x40x31
PL-HPEB-136W*UV	220-240	1*36	G13	T8	440	YES	YES	183x32x26

代表系列号 A/B/C/D (stand for A/B/C/D Series)

系列说明：Series of instructions

*A & B系列镇流器：A系列按CE标准，PF> 0.90 // B系统 按CE标准，PF> 0.90带预热启动和异常保护功能，内置.带遥控器，外按微波感应端口，同时有通用外接微波器供选择

A & B series ballasts: Stand for A with the CE PASS ,PF>0.90 // Stand for B with the CE PASS ,PF>0.90 , with preheating start and abnormal protection, built-in.With remote control, external microwave terminal, We also provide a universal external microwave device with extra price

*C & D系列镇流器：C系列，PF> 0.50 // D系列，PF> 0.50带预热启动和异常保护功能，内置.带遥控器，外按微波感应端口，同时有通用外接微波器供选择
C & D series ballasts: Stand for C ,PF>0.50 // Stand for D ,PF>0.50 , with preheating start and abnormal protection, built-in.With remote control, external microwave terminal, We also provide a universal external microwave device with extra price


UVC-17H1 E27 一体式杀菌灯 Integrated sterilization lamp



产品参数：PRODUCT PARAMETER

产品型号 Product model	底座 The base	外形 Shape	功率 power (W)	波长 The wavelength (mm)	UVC 辐射功率 Radiated power (uvc) (W)	UVC 照度 UVC intensity (uw/cm2) at 1m	管径 Tube Dia (mm)	长度 Length (mm)
UVC-17H1 E27 18w	E27	CFL	18	253.7	5.3	57	75	300
UVC-17H1 E27 24w	E27	CFL	24	253.7	7.2	94	75	400
UVC-17H1 E27 36w	E27	CFL	36	253.7	10.8	145	75	510
UVC-17H1 E27 55w	E27	CFL	55	253.7	16.5	170	75	610

UVC灯管/UVC LAMP



UV灯管要求：

无臭氧 石英管 8000小时寿命


UV lamp requirements:

no ozone quartz tube 8000 hours of life

产品参数：PRODUCT PARAMETER

产品型号 Product model	底座 The base	外形 Shape	功率 power (W)	波长 The wavelength (mm)	UVC 辐射功率 Radiated power (uvc) (W)	UVC 照度 UVC intensity (uw/cm2) at 1m	管压 voltage (V)	灯管电流 Tube Current (mA)	管径 Tube Dia (mm)	长度 Length (mm)
UVC-H/U PLL 18w	2G11	H/U	18	253.7	5.4	59	58	370	18	220
UVC-H/U PLL 24w	2G11	H/U	24	253.7	7.2	82	87	350	18	315
UVC-H/U PLL 36w	2G11	H/U	36	253.7	10.8	130	106	440	18	410
UVC-H/U PLL 55w	2G11	H/U	55	253.7	16.5	170	105	530	18	535
UVC-LB T8 10w	G13	T8	10	253.7	3.0	23	45	230	26	331
UVC-LB T8 15w	G13	T8	15	253.7	4.5	48	51	340	26	437
UVC-LB T8 20w	G13	T8	20	253.7	6.0	75	80	360	26	589
UVC-LB T8 30w	G13	T8	30	253.7	9.0	100	100	370	26	894
UVC-LB T8 36w	G13	T8	36	253.7	10.8	145	103	440	26	1199

PL-JS2001-01
Controlling system for ventilating light

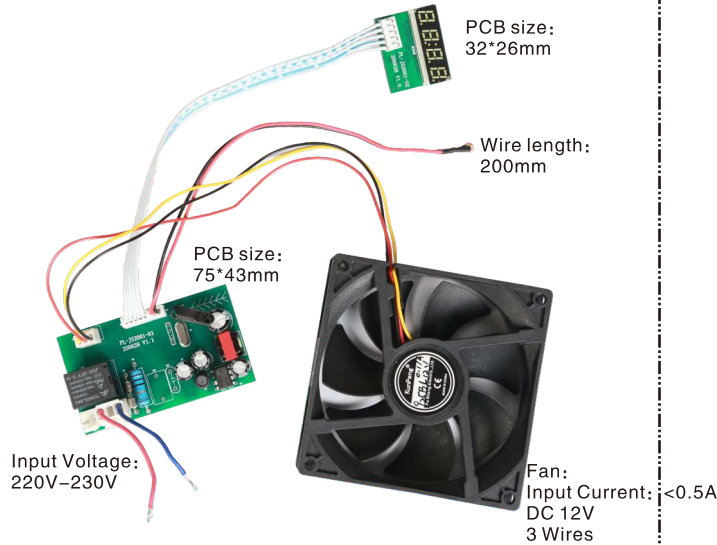

功能 Function:
风扇异常显示,
当风扇出现异常,
显示器显示F
Fan Abnormal Display
When The Fan Abnormal
Display F



功能 Function:
遥控开关, 定时功能
Remoting and timing




功能 Function:
灯具异常警示 当灯具出现
异常 显示器显示U
When the lamp is
abnormal, the display
will display U



功能 Function:
显示灯管寿命倒计时
Display the countdown of
lamp tube life

PL-JS2002-01
Controlling system for open UVC light

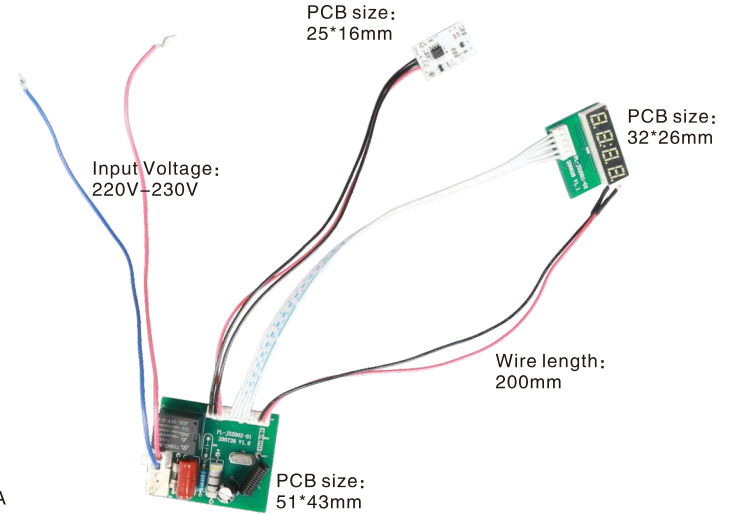


功能 Function:
灯具异常警示 当灯具出现
异常 显示器显示U
When the lamp is
abnormal, the display
will display U



人体感应周围5.5米以内,
当检测到有任何移位, 灯具
马上关闭停止运行。如果在
15秒没有检测到任何移动,
UV灯具开始工作, 继续计时
The human body sensor is within
5.5 meters of turnover. When any
shift is detected, the lamp will stop
running immediately. If no
movement is detected within 15
seconds, the UV lamp starts
working and the timer continues



功能 Function:
显示工作时间
Display working hours



功能 Function:
遥控开关, 定时功能
Remoting and timing

LUXDATOR

HIGH PERFORMANCE LED DRIVER SOLUTION

UV镇流器

Ballast for UV lamp

PL-HMEB系列/series

220-240V

铁壳 内置镇流器

Metal/ Built-in ballast



产品参数: PRODUCT PARAMETER

产品型号 Model Number	输入电压 Input Voltage (V)	功率 Power (W)	灯头 lamp holder	外型 Appearance	灯管电流 lamp current	EMC	PF	预热启动 preheat	异常保护 with abnormal protection	产品尺寸 L*W*H Product size (mm)
PL-HMEB-124WAUV	220-240	1*24	2G11	H/U	350	YES	> 0,90	YES	YES	240x27x22
PL-HMEB-136WAUV	220-240	1*36	2G11	H/U	440	YES	> 0,90	YES	YES	240x27x22

UV镇流器 带遥控和人体感应功能


Ballast for UV lamp with remote and body sensor

PL-HOEB系列/series

220-240V/100-260V

内置镇流器

Built-in ballast

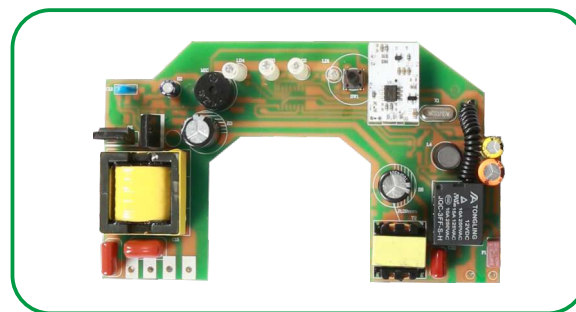

产品参数: PRODUCT PARAMETER

产品型号 Model Number	输入电压 Input Voltage (V)	功率 Power (W)	灯头 lamp holder	外型 Appearance	灯管电流 lamp current	EMC	PF	预热启动 preheat	异常保护 with abnormal protection	遥控器距离 Remote control distance (meters)	微波距离 Microwave distance (meters)	产品尺寸 L*W*H Product size (mm)
PL-HOEB-036WA3UV	220-240	1*36	2G11	H/U	440	NO	> 0,5	YES	YES	20	< 5.5	126x75x32
PL-HOEB-036WB3UV	100-260	1*36	2G11	H/U	440	NO	> 0,9	YES	YES	20	< 5.5	126x75x32

UVC TABLE 38W UVC微波感应杀菌灯 UVC Germicidal Lamp



<p>Mite Removal High Mites Removal Rate</p>	<p>Sterilizing 99.9% Sterilizing Rate</p>
<p>Micro-wave Sensor With body sensor For your life healthier</p>	<p>Touch control More convenient to use</p>
<p>3 level timing 15'/30'/60' Automatically shut down</p>	<p>Wide coverage Purify the whole family</p>



产品参数：PRODUCT PARAMETER

*型号 Item No .	UVC TABLE 38W		
*尺寸 Size (mm)	155.8*160*426.2		
*电压 Rated Voltage	220~240V		
*频率 Frequency	50~60Hz		
*功率 Power	38W		
*灯管类型Tube type	Quartz Glass 2G11 36W		
*开关类型Switch type	3-position digital timing switch		
*控制方式Control mode	Wireless remote control ,with body sensor.		
*UV照度UV INTENSITY (1m)	140uw/cm ²		
*建议消毒面积 Recommendedsterilizing area	15MIN	30MIN	60MIN
	20m ²	30m ²	40m ²
*UV波长UV Wavelength	253.7nm		

UVC ARM 36W UVC微波感应杀菌灯 UVC Germicidal Lamp



产品参数：PRODUCT PARAMETER

*型号 Item No .	UVC ARM 36W		
*尺寸 Size (mm)	150.5*160*425		
*电压 Rated Voltage	220~240V		
*频率 Frequency	50~60Hz		
*功率 Power	36W		
*灯管类型Tube type	Quartz Glass 2G11 36W		
*开关类型Switch type	3-position digital timing switch		
*控制方式Control mode	Wireless remote control ,with body sensor.		
*UV照度UV INTENSITY (1m)	140uw/cm ²		
*建议消毒面积 Recommendedsterilizing area	15MIN	30MIN	60MIN
	20m ²	30m ²	40m ²
*UV波长UV Wavelength	253.7nm		