
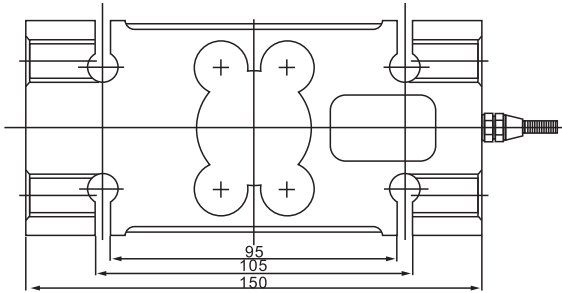



SP60

称重传感器 Load cells

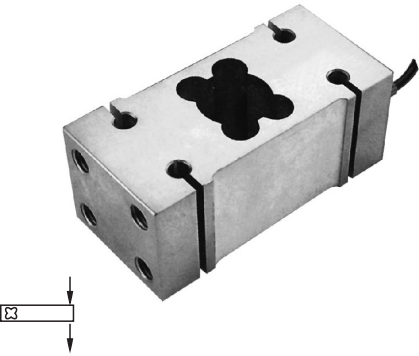

配料秤、包装秤、动态检测系统、台秤
Blengding scale,packing scale,dynamic testing system,platform scale

Specifications 技术说明

Exc+激励正 (Red,红);Exc-激励负(Black,黑);;Sig+信号正(Green,绿);;Sig-信号负(White,白)

额定载荷 Rated Load	50,100,150,200,250,300,500,750,1000,1500,2000kg	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	2.0±0.2mV/V	安全过载 Safe load limit	150%F.S
综合误差 Total error	±0.02%F.S;±0.03%F.S	极限过载 Over load limit	200%F.S
蠕变（30分钟）Creep(30min)	±0.02%F.S	推荐激励电压 Recommendexcitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximumu excitation	15V DC
零点温度影响 TCO	±0.02%F.S/10℃	密封等级 Protection Class	IP67(IL)
输出温度影响 TC SPAN	±0.02%F.S/10℃	材质 Construction	合金钢Alloy Steel,-SS:不锈钢Stainless Steel
输入阻抗 Input resistance	400±20Ω	电缆 Cable	Length:3m
输出阻抗 Output resistance	352±3Ω		Diameter: Φ 5mm
绝缘电阻 Insulation resistance	≥5000MΩ		