



SP61

称重传感器 Load cells

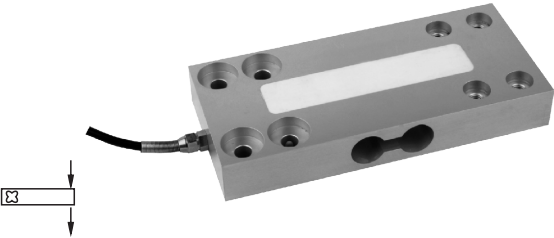

各种超低、超大平台秤
All kinds of ultralow max platform scale

额定载荷(kg) Rated Load	A	B	M	D	E	F	G	L1	L2	L3	L4
50,100	25	φ 9	M18	φ 18	φ 18	8	8	200	110	80	56
150	27	φ 11	M10	φ 18	φ 27	8	8	220	126	98	66
300	31	φ 11	M10	φ 18	φ 27	8	8	220	126	98	66
500	36	φ 11	M10	φ 18	φ 27	8	8	220	126	98	66
1000,1200	47	φ 13	M12	φ 22	φ 27	10	10	220	126	98	66

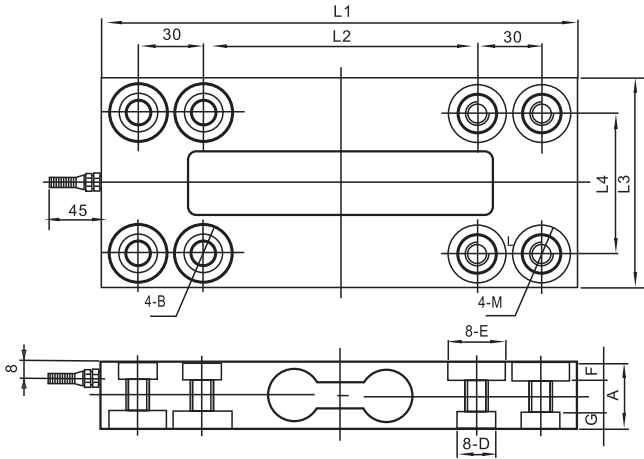

Specifications 技术说明

Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

额定载荷 Rated Load	50,100,150,300,500,1000,2000kg	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	1.8±0.2mV/V	安全过载 Safe load limit	150%F.S
综合误差 Total error	±0.03%F.S	极限过载 Over load limit	200%F.S
蠕变（30分钟） Creep(30min)	±0.03%F.S	推荐激励电压 Recommendexcitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximumu excitation	15V DC
零点温度影响 TCO	±0.02%F.S/10℃	密封等级 Protection Class	IP67
输出温度影响 TC SPAN	±0.02%F.S/10℃	材质 Construction	铝合金Aluminium
输入阻抗 Input resistance	400±20Ω	电缆 Cable	
输出阻抗 Output resistance	352±3Ω		Length:2.5m
绝缘电阻 Insulation resistance	≥5000MΩ		Diameter: φ 5mm