



SP80

称重传感器 Load cells

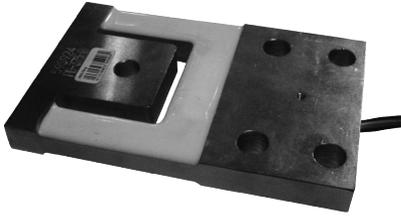

额定载荷(kg) Rated Load	L1	L2	L3	L4	L5	W1	W2	H	Φ D1	Φ D2	
3.75	70	4.9	14	28	23.7	39	27.8	2	5.1	5.1	
7.5											2.5
15											4.1
37.5	76.2	6	15	29.3	27	44.5	30	4.8	7.6	6.6	
75	84.4	6.4		34	27.7	54.8		6.4			
150	107.3	7.8	22.9	45.9	38.4	69.9	44.5	7.9	9.1	8.1	
375	119.4	9.1	25.4	52.6	43.7	76.1	50.8	12.7		9.8	

吊钩秤
Hook scale

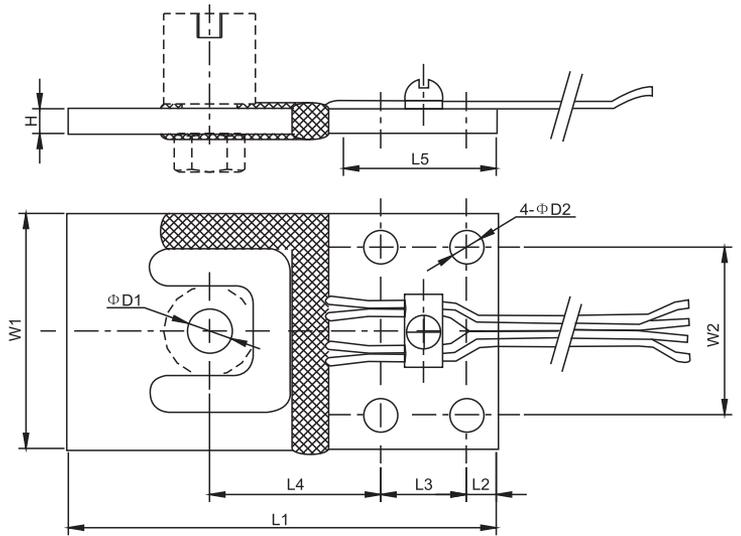

Specifications 技术说明 Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)

额定载荷 Rated Load	3.75,7.5,15,37.5,75,150,375kg	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	1.0±0.05mV/V	安全过载 Safe load limit	200%F.S
综合误差 Total error	±0.05%F.S	极限过载 Over load limit	300%F.S
蠕变 (30分钟) Creep(30min)	±0.05%F.S	推荐激励电压 Recommend excitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximum excitation	15V DC
零点温度影响 TCO	±0.2%F.S/10℃	密封等级 Protection Class	IP65
输出温度影响 TC SPAN	±0.2%F.S/10℃	材质 Construction	铝合金Aluminium
输入阻抗 Input resistance	1100±20Ω	电缆 Cable	
输出阻抗 Output resistance	1002±5Ω		Length:51cm(7/0.15四色排线)
绝缘电阻 Insulation resistance	≥5000MΩ		