


SPK06

称重传感器 Load cells



额定载荷(t) Rated Load	D1	D2	D3	M*P	H1	H2	H3	H4	H5
10	φ 50	φ 40	φ 138	M20*1.5	17	35	74	134.5	20.55
20,25	φ 65	φ 50	φ 165	M24*1.5	25	50	87	171	20.55
30	φ 75	φ 50.8	φ 165	M30*1.5	25	55	86.1	176	21
40	φ 85	φ 76.2	φ 165	M40*1.5	25	65	95.8	221	25.4

轴量秤、仓储秤、实验机
Axle where scale,warehouse scale testing equipment

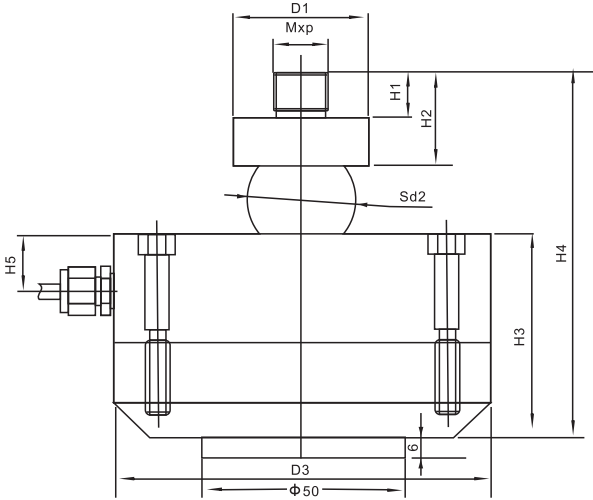

Specifications 技术说明		Exc+激励正 (Red,红);Exc-激励负(Black,黑);Sig+信号正(Green,绿);Sig-信号负(White,白)	
额定载荷 Rated Load	10,20,25,30,45t	工作温度范围 Operating Temp Range	-30~+70℃
灵敏度 Sensitivity	3.0±0.006mV/V	安全过载 Safe load limit	150%F.S;120%F.S(30,40t)
综合误差 Total error	±0.05%F.S;±0.1%F.S	极限过载 Over load limit	250%F.S;200%F.S(30,40t)
蠕变（30分钟） Creep(30min)	±0.05%F.S	推荐激励电压 Recommendexcitation	10~12V DC
零点平衡 Zero balance	± 1%F.S	最大激励电压 Maximumu excitation	15V DC
零点温度影响 TCO	±0.02%F.S/10℃	密封等级 Protection Class	IP67
输出温度影响 TC SPAN	±0.02%F.S/10℃	材质 Construction	合金钢Alloy Steel
输入阻抗 Input resistance	400±10Ω	电缆 Cable	
输出阻抗 Output resistance	352±2Ω;352±5Ω (L≥15m)		Length:12m(10~25t),16m(30~40t)
绝缘电阻 Insulation resistance	≥5000MΩ		Diameter: φ 6mm